



The LED floodlights provide optimal illumination by producing a light that is both powerful and standardized. This lighting solution can be oriented in the targeted area thanks to its directional flow to allow a reduction of dark spaces. Besides reducing the loss of lighting, it allows, among other benefits, to optimize the use of the light emitted for a high light output with a better quality of light. Extremely practical, they agree on the facades and in the smallest places to illuminate the aisle or building.

Applications

- General lighting
- Lighting of squares & access roads
- Buildings Lighting
- Industrial lighting
- Sport lighting

Benefits

- Luminous efficiency: More than 120 Lumens/W
- Ingress Protection: IP66
- Mechanical Impact Protection: IK08
- Lifespan: 100,000 H+
- Manufacturer warranty: 2 years



	Power	100W	200W	300W	400W
Nominal Power	100-265V AC 50/60Hz				
LED Technology	SMD				
Dimmability	Optionnal Dimmable Driver 0/1 to 10				
Luminous efficiency	More than 120 Lumens/W				
Luminous Flux	>12 000 Lm	>24 000 Lm	>36 000 Lm	>48 000 Lm	
Color Rendering Index	≥75				
Ingress Protection	IP66				
Mechanical Impact Protection	IK08				
Lifespan	100 000 Hours				
Protection Class CEI	Security Class II (Class II)				
Operating Temperature	-10°C to +50°C				

Materials

Luminar Body	High-pressure die-cast aluminum
Lenses	PPMA
Screws and bolts	INOX AISI 304
Sealing gasket	Aging-resistant silicone gasket

Dimensions (mm)	403 x 183 x 110	403 x 287 x 110	403 x 391 x 110	403 x 495 x 110
-----------------	-----------------	-----------------	-----------------	-----------------



Adresse : Immeuble 3s, Rue Abou Hamed El Ghazeli, Montplaisir, Tunis Tunisie



contact@candyled.com

Tél. : +216 71 120 210

Fax : + 216 70 200 902




www.candyled.com


Modular Flood Lights Range



Drawings

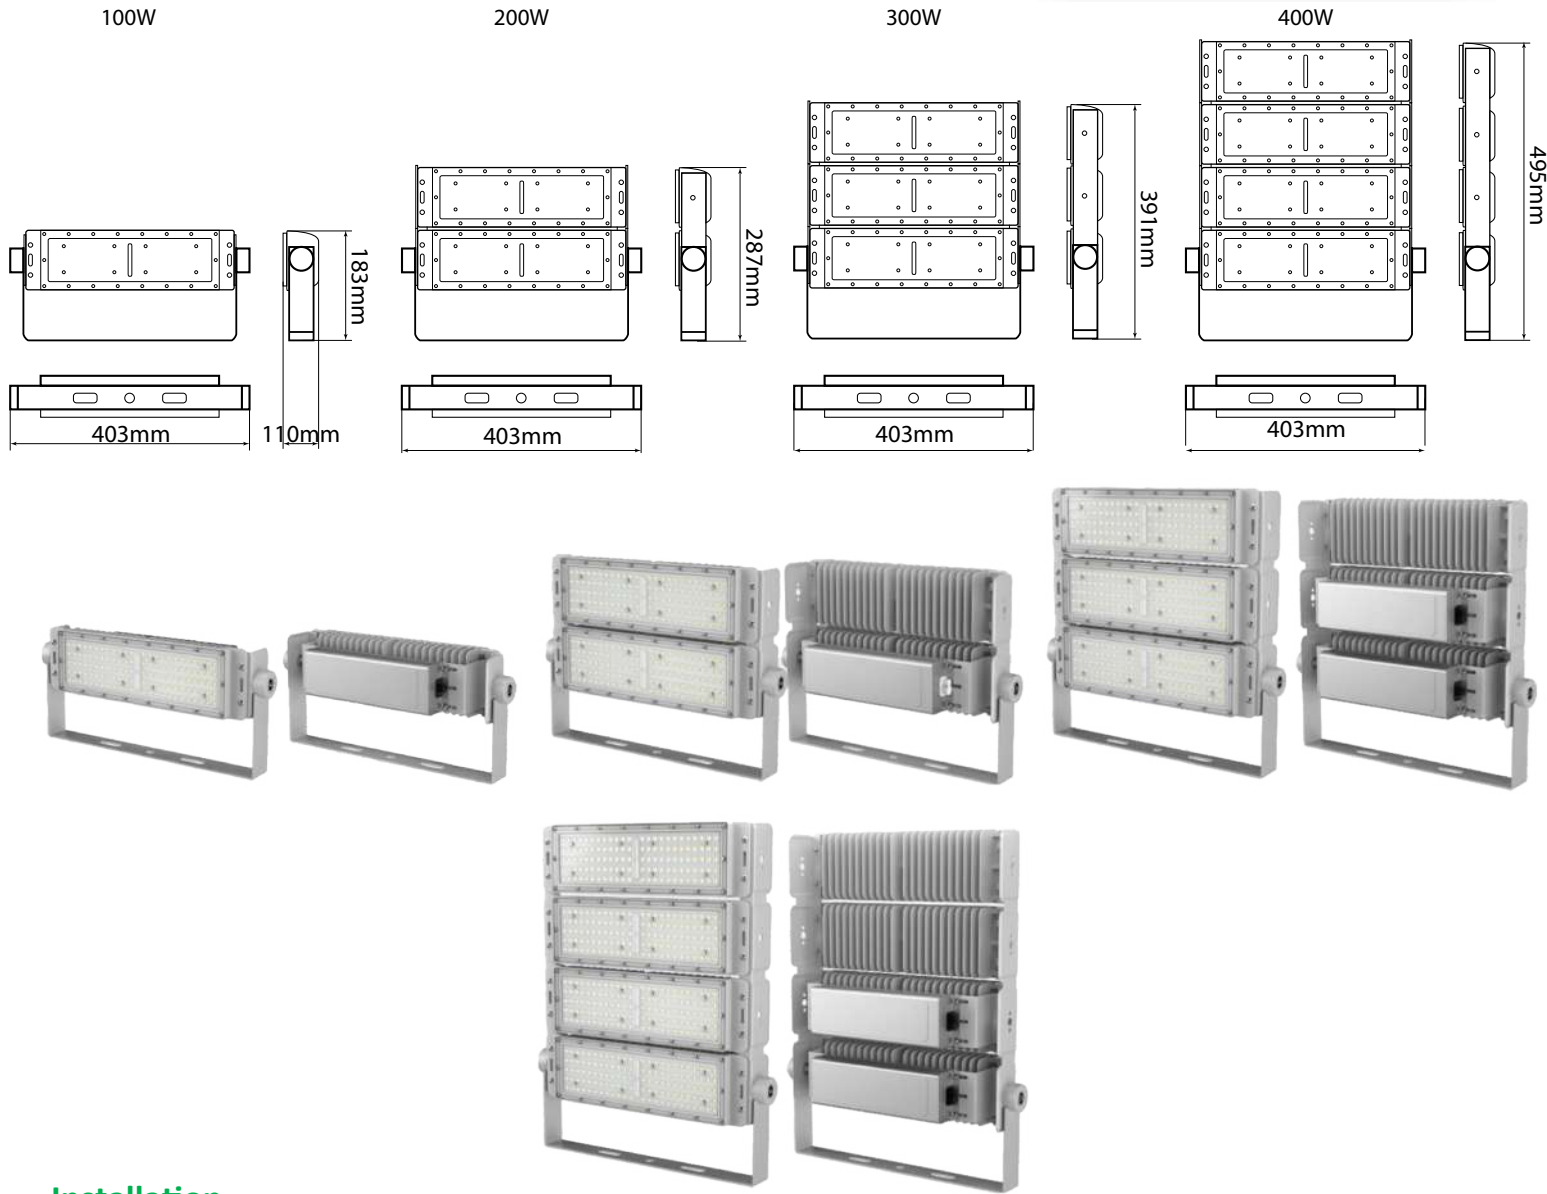

Installation

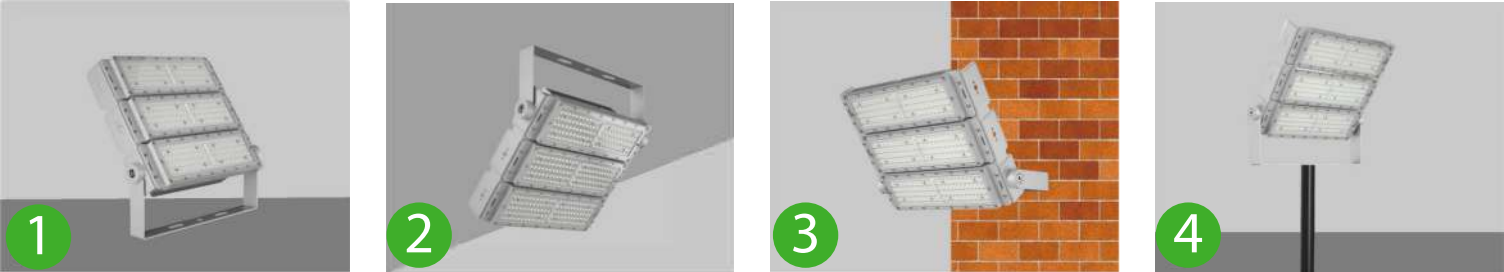

Flood Mounting

Ceilling Mounting

Wall Mounting

Pole Mounting



Management
System
ISO 9001:2015
Valid until:
2024-10-26

www.tuv.com
ID 9000017329

