



The CandyLED spots are recommended for general lighting by creating both friendly atmosphere and accent lighting (showcases and exhibition area).


This range offers immediate energy savings, long life and excellent value for money.

Applications

- General lighting
- Reception area, Rooms, halls & corridors, toilets
- Hotels, restaurants, bars, cafes, museums, shops
- Exhibition space, shop windows & shops
- Bathroom & Sauna (requiring a waterproof set)
- Traffic lane markup, doors, stairs.
- Outdoor use (only in suitable luminaires)

Benefits


- Quick ROI
- Significant energy savings (up to 80% compared to conventional spots)
- Lifespan: 30 000 H+
- Easy installation: Standard base GU5.3
- Alternatives to conventional lighting
- Wide choice of color temperature (3 000K, 4 000K & 6 500K)

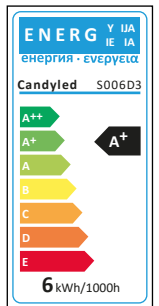

Characteristics

Voltage	220-240V AC 50Hz
LED Technology	SMD
Power	6W
Luminous Flux	660 Lumens
Color Temperature	3 000 - 4 000 - 6 500K Warm White - Neutral White - Cold White
Color Rendering Index	≥80
Ingress Protection	IP40
Lifespan	30 000H+
Operating Temperature	-10°C to +50°C

Dimensions (mm)

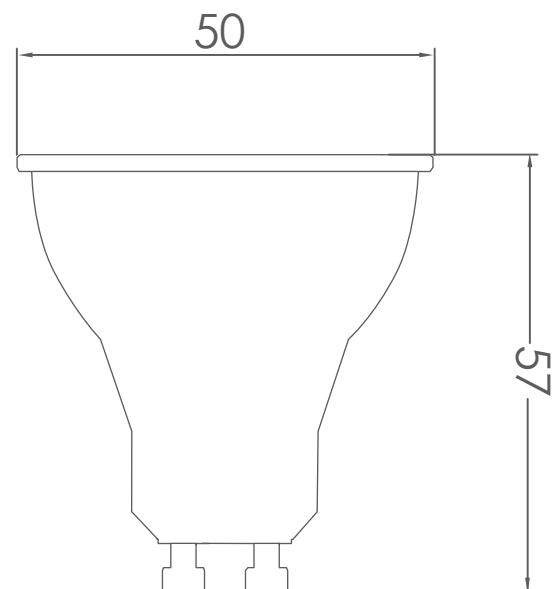

Length (mm) : 50 / Width (mm) : 50 / Height (mm) : 57

Materials

Housing	Housing in PS + Aluminium Heat sink
Cover	Polycarbonate



Adresse : Immeuble 3s, Rue Abou Hamed El Ghazeli, Montplaisir, Tunis Tunisie

✉ contact@candyled.com

Tél. : +216 71 120 210

Fax : + 216 70 200 902

@ www.candyled.com