



The LED panel is designed to replace all square, diffuse lighting systems that provide a large illuminated surface.

Thanks to its technology, it minimizes energy consumption while guaranteeing the lux level required to comply with current standards.

Its performance, visual comfort and excellent light diffusion quality make it suitable for all indoor ceiling lighting applications, as a replacement for fluorescent troffers.

Applications

- Reception areas
- Retail and offices
- Hospitals and clinics
- Administrative premises (Banking and Insurance)

Benefits

- Lighting surface combining performance and smart design
- Recreates the natural rhythm of daylight
- Uniform light
- Reduced installation costs and time
- Lifespan: 50,000+ hours




Ecoline
Series



Characteristics

Nominal Power	90-275V AC 50Hz
Power factor	0.98
Protection Class CEI	Classe 1
Power	40W
LED technology	SMD
Dimmability	Non (optional)
Color temperature	4 000K - 6 500K
	Neutral White - Cold White
Color rendering index	≥ 80
Luminous efficiency	100 Lumens/W
Luminous flux	4 000 Lumens
Beam angle	120°
Turn-on time	<0.5 seconde
IP rating	IP20
Lifespan	50 000H+
Operating temperature	-10°C à +50°C

Dimensions (mm)

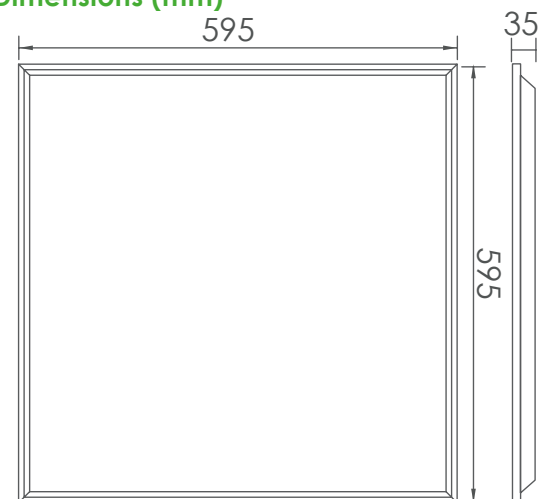

Materials

Housing	Coated aluminium
Diffuser	Polycarbonate

Surface-mount, suspended and plasterboard-recessed mounting kits are sold separately.
Dimmability: 0/1-10V dimmable driver available as an option.



Adresse : Immeuble 3s, Rue Abou Hamed El Ghazeli, Montplaisir, Tunis Tunisie

✉ contact@candyled.com

Tél. : +216 71 120 210

Fax : + 216 70 200 902

@ www.candyled.com